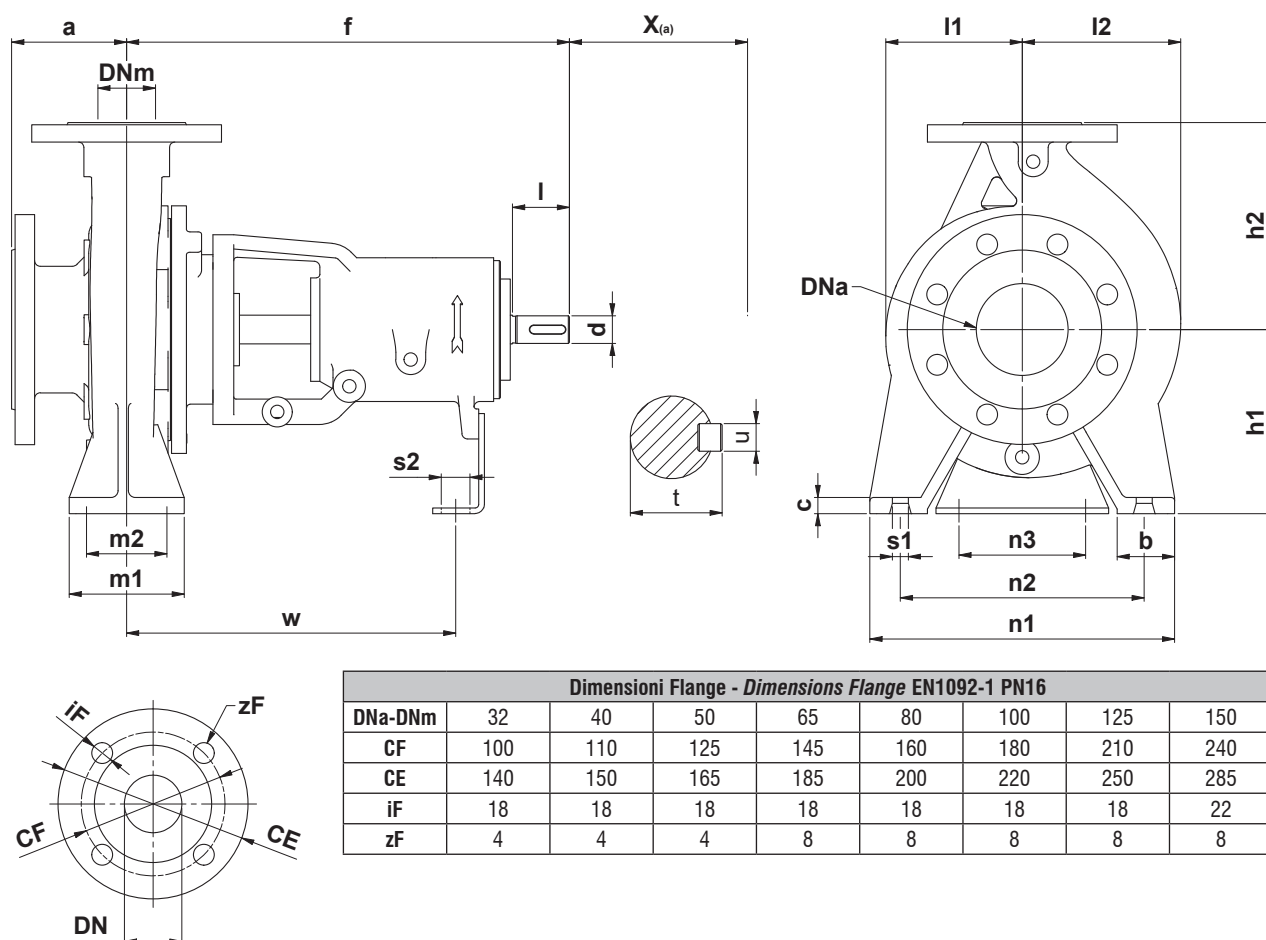


Ingombri asse nudo
Bare shaft overall dimensions


Dimensioni Flange - Dimensions Flange EN1092-1 PN16								
DNa-DNm	32	40	50	65	80	100	125	150
CF	100	110	125	145	160	180	210	240
CE	140	150	165	185	200	220	250	285
iF	18	18	18	18	18	18	18	22
zF	4	4	4	8	8	8	8	8

Pompa tipo Pump size	Supporto Bearing Housing	DIMENSIONI - DIMENSIONS [mm]																						Peso Weight [kg]	
		Pompa - Pump						Piedi - Feet										Albero - Shaft							
		DNa	DNm	a	f	h1	h2	b	c	m1	m2	n1	n2	n3	s1	s2	w	d	l	t	u	l1	l2		x ^(a)
32-16	25	50	32	80	385	132	160	50	14	100	70	240	190	110	14	14	285	24	50	27	8	103	115	100	37
32-20	25	50	32	80	385	160	180	50	14	100	70	240	190	110	14	14	285	24	50	27	8	122	130	100	42
40-16	25	65	40	80	385	132	160	50	14	100	70	240	190	110	14	14	285	24	50	27	8	109	122	100	39
40-20	25	65	40	100	385	160	180	50	14	100	70	265	212	110	14	14	285	24	50	27	8	126	136	100	43
50-16	25	80	50	100	385	160	180	50	14	100	70	265	212	110	14	14	285	24	50	27	8	119	138	100	43
50-20	25	80	50	100	385	160	200	50	14	100	70	265	212	110	14	14	285	24	50	27	8	136	152	100	48
50-25	35	80	50	125	500	180	225	65	16	125	95	320	250	110	14	14	370	32	80	35	10	157	170	100	77
65-16	35	100	65	100	500	160	200	65	15	125	95	280	212	110	14	14	370	32	80	35	10	127	154	100	61
65-20	35	100	65	100	500	180	225	65	16	125	95	320	250	110	14	14	370	32	80	35	10	145	167	140	66
65-25	35	100	65	125	500	200	250	65	18	160	120	360	280	110	18	14	370	32	80	35	10	167	188	140	86
65-31	50	100	65	125	530	225	280	80	18	160	120	400	315	110	18	14	370	42	110	45	12	196	212	140	129
80-16	35	125	80	125	500	180	225	65	15	125	95	320	250	110	14	14	370	32	80	35	10	136	173	140	67
80-20	35	125	80	125	500	180	250	65	16	125	95	345	280	110	14	14	370	32	80	35	10	152	185	140	76
80-25	35	125	80	125	500	225	280	80	18	160	120	400	315	110	18	14	370	32	80	35	10	175	205	140	95
80-31	50	125	80	125	530	250	315	80	18	160	120	400	315	110	18	14	370	42	110	45	12	205	227	140	135
100-20	35	125	100	125	500	200	280	80	18	160	120	360	280	110	18	14	370	32	80	35	10	160	204	140	80
100-25	50	125	100	140	530	225	280	80	18	160	120	400	315	110	18	14	370	42	110	45	12	186	218	140	109
100-31	50	125	100	140	530	250	315	80	18	160	120	400	315	110	18	14	370	42	110	45	12	213	241	140	139
100-40	50	125	100	140	530	280	355	100	20	200	150	500	400	110	23	14	370	42	110	45	12	255	280	140	175
125-25	50	150	125	140	530	250	355	80	18	160	120	400	315	110	18	14	370	42	110	45	12	203	248	140	128
125-31	50	150	125	140	530	280	355	100	20	200	150	500	400	110	23	14	370	42	110	45	12	226	263	140	151
125-40	50	150	125	140	530	315	400	100	20	200	150	500	400	110	23	14	370	42	110	45	12	265	295	140	191

Quote e pesi suscettibili di variazione
Dimensions and weights are subject to variation

(a) Lunghezza giunto Spaziatore
Spacer coupling's length